IndiQuattro

96547411 <IQ 2x24W T16 HF E3 LV L840

IP20 | IK03 | 960°C | T_a25

IndiQuattro

Recessed modular direct/indirect luminaire for 2 x 24W Light Source: 2 x T16 / 24W lamp(s) with electronic - fixed output and 3 hour manual test emergency lighting circuit. Body and coffer in white painted steel with satinbrite aluminium louvre and micro perforated white painted steel sides. Lay in installation to 15/24mm exposed tee ceilings only. Easy electrical connection via 4 x 2 x 2.5mm² terminal block under external access flap on rear of body. Complete with 840 lamp(s).

Dimensions: 597 x 597 x 70 mm
Luminaire input power: 49 W
Weight: 4.5 kg
Luminaire efficacy: 54 lm/W

TLG_INDQ_F_B1X55WLVRDSB.jpg

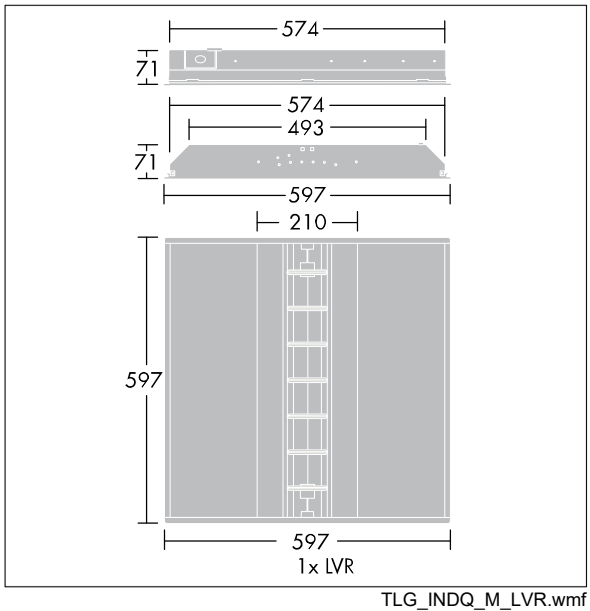

TLG_INDQ_M_LVR.wmf

Los valores marcados con un * son valores de referencia. Los valores son aplicables para una temperatura ambiente de 25 °C, a no ser que se indique de otro modo.

Los productos de Thorn Lighting están sujetos a un continuo desarrollo. Nos reservamos el derecho de planificar en nuestros productos sin publicaciones técnicas ni otras modicaciones formales.
© Thorn Lighting

IndiQuattro

96547411 <IQ 2x24W T16 HF E3 LV L840

Los productos de Thorn Lighting están sujetos a un continuo desarrollo. Nos reservamos el derecho de planificar en nuestros productos sin publicaciones técnicas ni otras modicaciones formales.
© Thorn Lighting