IndiQuattro

96548454 <IQ 2x24W T16 HF E3 OP L840

	IP20	IK03		CE	650°C	T_a25	

IndiQuattro

Recessed modular direct/indirect luminaire for 2 x 24W Light Source: 2 x T16 / 24W lamp(s) with electronic - fixed output and 3 hour manual test emergency lighting circuit. Body and coffer in white painted steel with reeded opal acrylic diffuser. Lay in installation to 15/24mm exposed tee ceilings only. Easy electrical connection via 4 x 2 x 2.5mm² terminal block under external access flap on rear of body. Complete with 840 lamp(s).

Dimensions: 597 x 597 x 70 mm
Luminaire input power: 49 W
Weight: 4.5 kg
Luminaire efficacy: 56 lm/W

TLG_INDQ_F_B1X55WLVROP.jpg

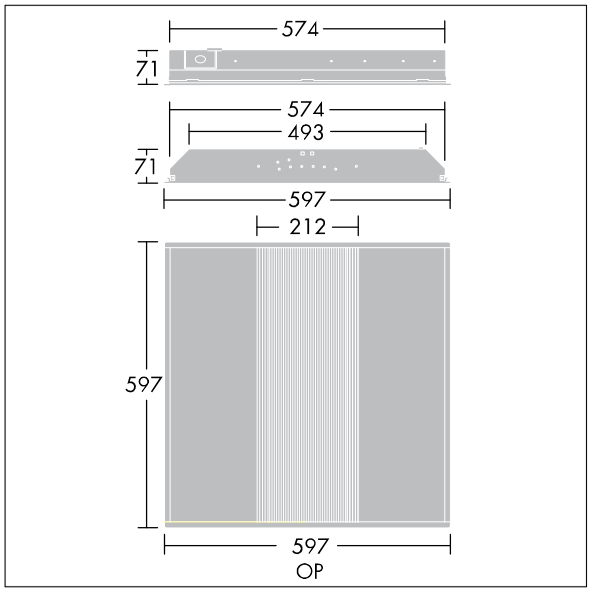

TLG_INDQ_M_BASREEDDIF.wmf

Los valores marcados con un * son valores de referencia. Los valores son aplicables para una temperatura ambiente de 25 °C, a no ser que se indique de otro modo.

Los productos de Thorn Lighting están sujetos a un continuo desarrollo. Nos reservamos el derecho de planificar en nuestros productos sin publicaciones técnicas ni otras modicaciones formales.
© Thorn Lighting

IndiQuattro

96548454 <IQ 2x24W T16 HF E3 OP L840

Los productos de Thorn Lighting están sujetos a un continuo desarrollo. Nos reservamos el derecho de planificar en nuestros productos sin publicaciones técnicas ni otras modicaciones formales.
© Thorn Lighting