THORN

# 96627521 <PRIM L3 LED19000-840 NB HFIX END SET

IP20 halogen IK02 CE

3000 mm length of trunking, for direct ceiling fixing or suspended mounting on wire or chains, with 19 000 lm LED luminaire with narrow distribution. LED converter Slave luminaire for DALI control (DALI only). Roll-formed sheet steel in  Polyester lacquered finish. Class I electrical, IP20. End module, without mechanical connector. Supplied with plug-in, 7-pole through wiring. Complete with side panels. Complete with 4000K LED.

Dimensions: 3000 x 68 x 93 mm
Luminaire input power: 127 W
Luminaire luminous flux: 19000 lm
Luminaire efficacy: 150 lm/W
Weight: 7.2 kg

TLG_PMM5_F_LEDPDB.jpg

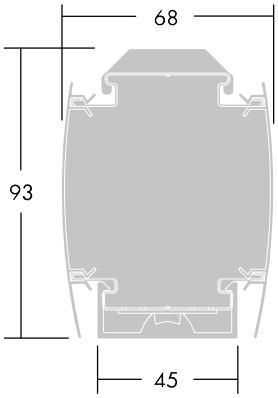


L2000: L = 2000mm
L3000: L = 3000mm

TLG_PMML_M_LED_bestueckt.wmf

Este producto contiene una fuente luminosa de la clase de eficiencia energética E.

Los valores marcados con un * son valores de referencia. Thorn utiliza componentes de fiabilidad y que han pasado los tests de calidad. Sin embargo, la tasa de fallos de la electrónica puede dar lugar a algún fallo aislado de algún LED durante la vida útil del producto.  Las normativas internacionales fijan la tolerancia del flujo inicial y carga asociada en ±10%. Los valores son aplicables para una temperatura ambiente de 25 °C, a no ser que se indique de otro modo.

Los productos de Thorn Lighting están sujetos a un continuo desarrollo. Nos reservamos el derecho de planificar en nuestros productos sin publicaciones técnicas ni otras modicaciones formales.
© Thorn Lighting