THORN

96642707 <NOVALINE LED3500-830 MWS WH

IP40	IK02		CE			850°C	T_a -20 +25	

A round bulkhead LED luminaire. Electronic, fixed output control gear. Body and bezel: finish, spun aluminium. Diffuser: opal polycarbonate. Class I electrical, IP40. With integral motion sensor for on/off control. Complete with 3000K LED.

Dimensions: Ø455 x 105 mm
Luminaire input power: 32.5 W
Luminaire luminous flux: 3200 lm
Luminaire efficacy: 98 lm/W
Weight: 2.28 kg

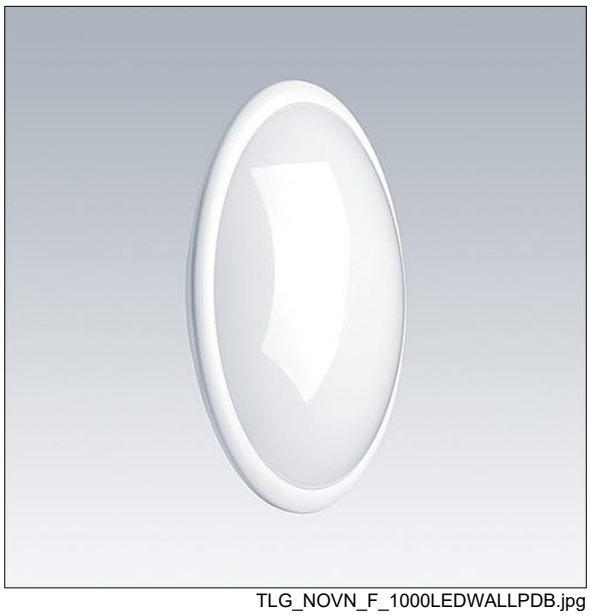

TLG_NOVN_F_1000LEDWALLPDB.jpg

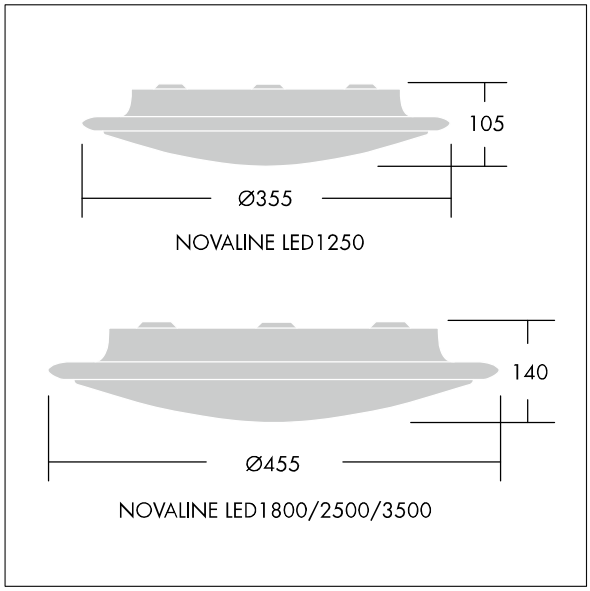

TLG_NOVN_M_LED2.wmf

Este producto contiene una fuente luminosa de la clase de eficiencia energética C.

Los valores marcados con un * son valores de referencia. Thorn utiliza componentes de fiabilidad y que han pasado los tests de calidad. Sin embargo, la tasa de fallos de la electrónica puede dar lugar a algún fallo aislado de algún LED durante la vida útil del producto. Las normativas internacionales fijan la tolerancia del flujo inicial y carga asociada en ±10%. Los valores son aplicables para una temperatura ambiente de 25 °C, a no ser que se indique de otro modo.

Los productos de Thorn Lighting están sujetos a un continuo desarrollo. Nos reservamos el derecho de planificar en nuestros productos sin publicaciones técnicas ni otras modicaciones formales.
© Thorn Lighting