IQ Beam

92927326 IQ BEAM 3000-840 MPT HFIX Q600

IEC EN 60598-1 RG 1		IP20	IK03		CE			650 °C	T_a -20 +40	

IQ Beam

A linear optic, recessed modular LED luminaire for exposed T, plasterboard and concealed grid ceilings. DALI-2 dimmable, LED driver. Class I electrical, IP20, Impact strength: IK03. Body: white painted steel. Diffuser: micro prism structure acrylic. Suitable for lay-in installation, pull up installation optional. Complete with 4000K LED.

Dimensions: 597 x 597 x 60 mm
Luminaire input power: 24.7 W
Luminaire luminous flux: 3200 lm
Luminaire efficacy: 130 lm/W
Weight: 4.16 kg

TLG_IQBM_F_pers_B.jpg

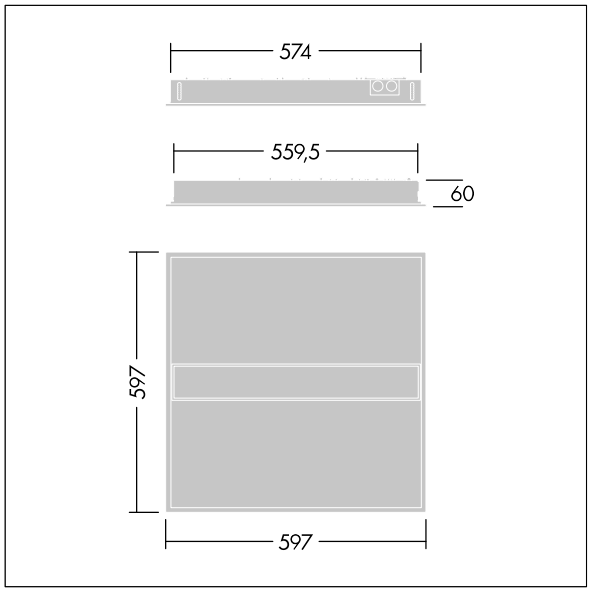

TLG_IQBM_M_LDQ.wmf

Este producto contiene una fuente luminosa de la clase de eficiencia energética C.

Los valores marcados con un * son valores de referencia. Thorn utiliza componentes de fiabilidad y que han pasado los tests de calidad. Sin embargo, la tasa de fallos de la electrónica puede dar lugar a algún fallo aislado de algún LED durante la vida útil del producto. Las normativas internacionales fijan la tolerancia del flujo inicial y carga asociada en ±10%. Los valores son aplicables para una temperatura ambiente de 25 °C, a no ser que se indique de otro modo.

Los productos de Thorn Lighting están sujetos a un continuo desarrollo. Nos reservamos el derecho de planificar en nuestros productos sin publicaciones técnicas ni otras modicaciones formales.
© Thorn Lighting