IQ Beam

92927345 IQ BEAM 4300-840 MPT HF E3D Q600

IEC EN 60598-1 RG 1 | IP20 | IK03 | 650 °C | T_a 0 +35

IQ Beam

A linear optic, recessed modular LED luminaire for exposed T, plasterboard and concealed grid ceilings. Fixed output, LED driver with 3 hour, Self/DALI Addressable test, emergency lighting circuit. Class I electrical, IP20, Impact strength: IK03. Body: white painted steel. Diffuser: micro prism structure acrylic. Suitable for lay-in installation, pull up installation optional. Complete with 4000K LED.

Dimensions: 597 x 597 x 60 mm
Luminaire input power: 32.2 W
Luminaire luminous flux: 4500 lm
Luminaire efficacy: 140 lm/W
Weight: 4.5 kg

TLG_IQBM_F_pers_B.jpg

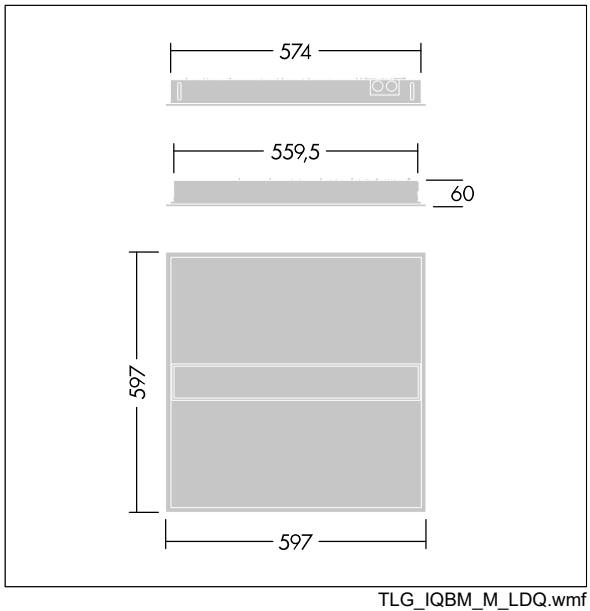

TLG_IQBM_M_LDQ.wmf

Este producto contiene una fuente luminosa de la clase de eficiencia energética C.

Los valores marcados con un * son valores de referencia. Thorn utiliza componentes de fiabilidad y que han pasado los tests de calidad. Sin embargo, la tasa de fallos de la electrónica puede dar lugar a algún fallo aislado de algún LED durante la vida útil del producto. Las normativas internacionales fijan la tolerancia del flujo inicial y carga asociada en ±10%. Los valores son aplicables para una temperatura ambiente de 25 °C, a no ser que se indique de otro modo.

Los productos de Thorn Lighting están sujetos a un continuo desarrollo. Nos reservamos el derecho de planificar en nuestros productos sin publicaciones técnicas ni otras modicaciones formales.
© Thorn Lighting