IndiQuattro

96548503 <INDI FAST 2x55W TC-L HF OP L840

IP20 | IK03 | 650°C | T_a25

IndiQuattro

Recessed modular direct/indirect luminaire for 2 x 55W Light Source: 2 x TC-L / 55W lamp(s) with electronic - fixed output circuit. Body and coffer in white painted steel with reeded opal acrylic diffuser. Lay in installation to 15/24mm exposed tee ceilings only. Easy electrical connection via 3 x 2 x 2.5mm² terminal block under external access flap on rear of body. Complete with 840 lamp(s).

Supplied ready to install, with lamps fitted, safety wire and protective film.

Dimensions: 597 x 597 x 70 mm
Luminaire input power: 97 W
Weight: 3.9 kg
Luminaire efficacy: 72 lm/W

TLG_INDQ_F_B1X55WLVROP.jpg

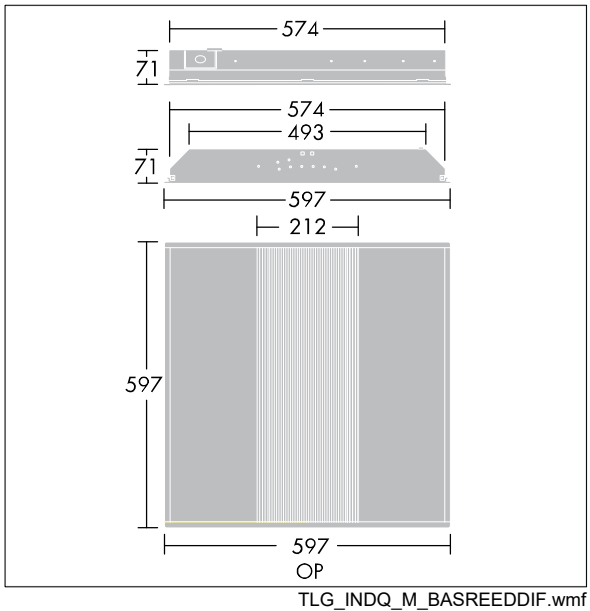

TLG_INDQ_M_BASREEDDIF.wmf

Los valores marcados con un * son valores de referencia. Los valores son aplicables para una temperatura ambiente de 25 °C, a no ser que se indique de otro modo.

Los productos de Thorn Lighting están sujetos a un continuo desarrollo. Nos reservamos el derecho de planificar en nuestros productos sin publicaciones técnicas ni otras modicaciones formales.
© Thorn Lighting