



ColdForce II

A high protection IP65 Proof fluorescent range for use in low temperature environments

- Robust industrial ballast ensures operation in low temperature environments down to -30°C
- Standard lamps combined with over - tubes ensures good stable light output
- Glass reinforced polyester (GRP) canopy
- High impact polycarbonate diffuser



Las fotos, dibujos y datos técnicos de iluminación son únicamente imágenes simbólicas. Para obtener datos detallados de un producto, por favor, pulse sobre el producto deseado.

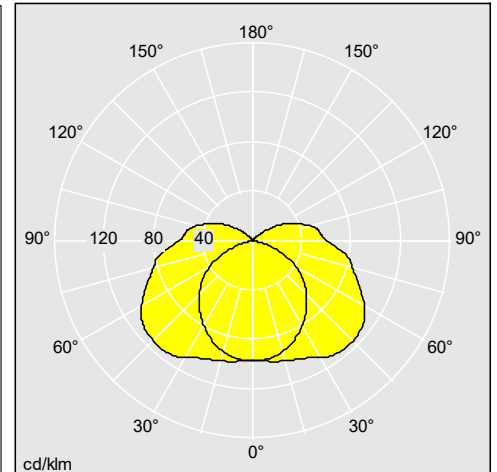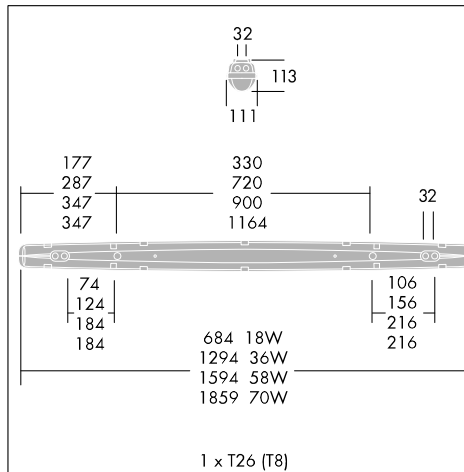

Material/ tipo

Canopy: glass-fibre reinforced polyester
 Diffuser: polycarbonate with linear prisms
 Gasket: expanded polyurethane
 Toggles: stainless steel
 Gear tray: steel, white enamelled finish

Instalación/ montaje

Cable entry positions at the back and each end of the fitting. Supplied with IP65 grommet. Stainless steel quick-fix brackets supplied with each luminaire. Stainless steel toggles are captive in the canopy to prevent loss during maintenance, and steel gear tray is retained by finger operated spring latches. BESA box and conduit mounting, chain suspension and catenary suspension kits, plus through wire kits are all available (see accessories listing). LSOH cabling as standard. Suitable for all indoor plus external 'under cover only' applications