




HeatForce

High performance IP65 proof luminaire that performs in high ambient temperature locations

- Robust industrial ballast ensures reliable operation up to 65°C (36W) or 55°C (58W)
- Deep channel single pour gasket ensures IP65 seal
- Para facilitar y agilizar las tareas de mantenimiento, la bandeja portaequipo está simplemente colgada de unos enganches internos.



Las fotos, dibujos y datos técnicos de iluminación son únicamente imágenes simbólicas. Para obtener datos detallados de un producto, por favor, pulse sobre el producto deseado.

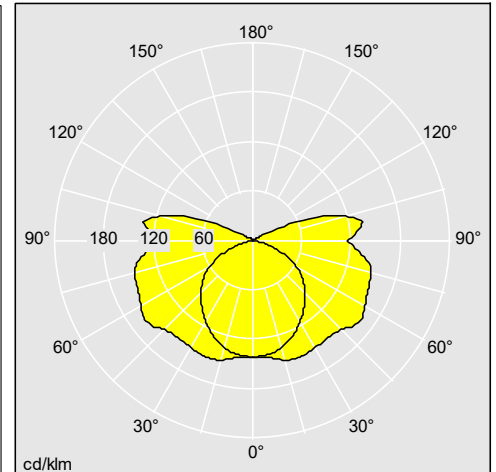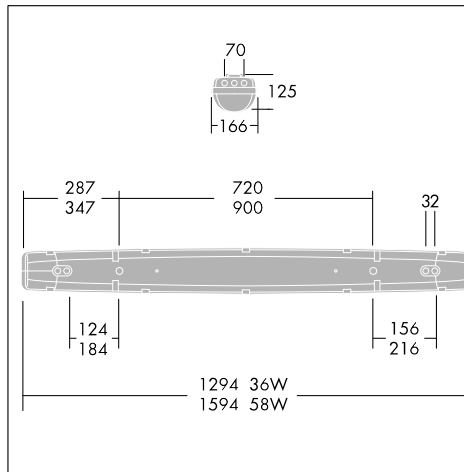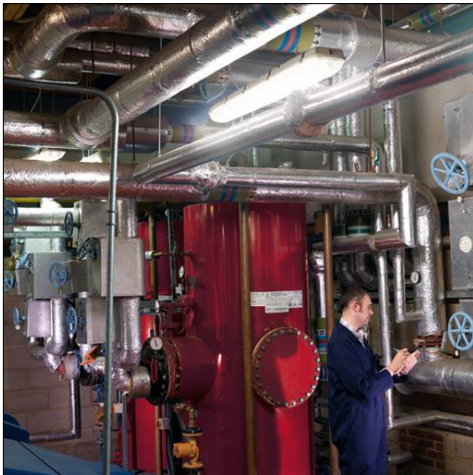

96234628

Material/ tipo

Canopy: glass-fibre reinforced polyester
 Diffuser: polycarbonate with linear prisms
 Gasket: expanded polyurethane
 Toggles: stainless steel
 Gear tray: steel, white enamelled finish

Instalación/ montaje

Cable entry positions at the back and each end of the fitting. Supplied with IP65 grommet. Stainless steel quick-fix brackets supplied with each luminaire. Stainless steel toggles are captive in the canopy to prevent loss during maintenance, and steel gear tray is retained by spring latches. BESA box and conduit mounting, chain suspension and catenary suspension kits, plus through wire kits are all available. LSOH cables as standard. If through wire kits are used the maximum ambient temperature is reduced (58W=47°C / 36W=57°C). Suitable for all indoor plus external 'under cover only' applications.