



Punch II T8

Surface or suspended performance lighting in a classic design

- Smooth, rounded body design gives unobtrusive appearance
- Louvres are optimised for optical performance with LOR up to 66% and luminance well below 1000cd/m²
- Direct/Indirect suspended versions provide uplight as well as downlight
- Surface versions can also be suspended for suspended direct illumination



Las fotos, dibujos y datos técnicos de iluminación son únicamente imágenes simbólicas. Para obtener datos detallados de un producto, por favor, pulse sobre el producto deseado.

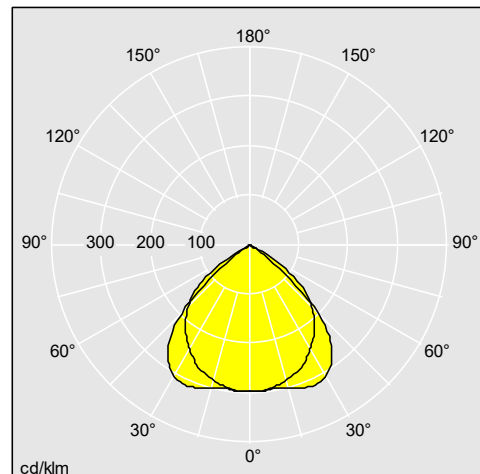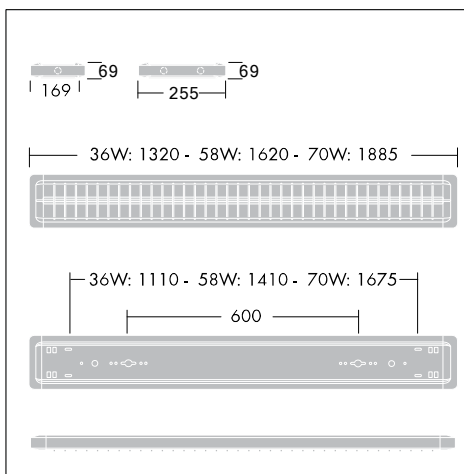

96504360

Material/ tipo

Body: sheet steel painted white (close to RAL9010)
 End cap: moulded in white polycarbonate
 Louvres: aluminium, painted white or anodised.

Instalación/ montaje

Electrical installation via piano-key terminal blocks, two cable entry points at centre of fitting. Clips retain the louvre to enable hinging for easy lamp replacement and maintain earth continuity. Surface versions mounted with spacers via keyholes and C-washers. Single/twin surface and DI versions can be suspended via optional wire suspension kits, close offset rod or pendant rod kits. Continuous line mounting of luminaires via optional connect kit.

UK: BESA accessory kit available for mounting onto BESA box.