




Plurio

Versatile post-top lantern, dark sky compliant offering Nighttune technology

- IDA Dark Sky Approved
- *IDA fixture seal of approval relates to ≤ 3000 K only and clear enclosures. Luminaires must be mounted as photometered.
- High versatility with a choice of four canopy designs : original, round, flat and disc
- Direct or indirect lighting
- Nighttune technology
- Zd4i certified on request



Las fotos, dibujos y datos técnicos de iluminación son únicamente imágenes simbólicas. Para obtener datos detallados de un producto, por favor, pulse sobre el producto deseado.

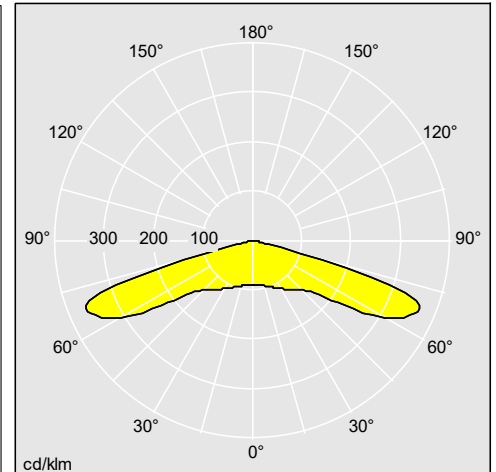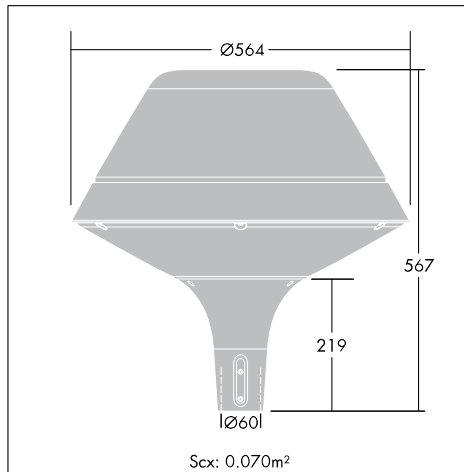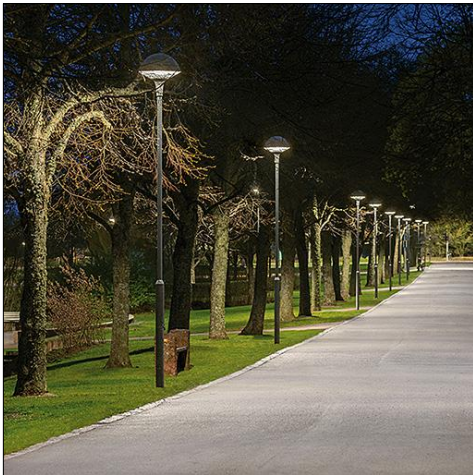

96272421

Material/ tipo

Base and canopy: die-cast aluminium

Via the configurator: texturized anthracite, black (R9005) and light grey and 48 other RAL possibilities

Ø60 mm: EN AC-44300, standard corrosion class C5 according to ISO 9223: 2012. Ø76 mm: EN AC-47100, standard corrosion class C3

Diffuser: clear UV stabilized polycarbonate with anti glare prisms on the outer part

Internal reflector and cable pipe: white highly reflective ABS (plastic)

Mirrors (asymmetrical version): high reflective anodised aluminium

Screw fixings: stainless steel

Instalación/ montaje

Post top mounting. Recommended height: 3-4m

Spigot: 60mm (length: 75mm) or 76mm (length: 100mm)

Dedicated range of columns and brackets

Access to LEDs and gear via 3 screws below the bowl

Pre-wired versions available via configurator

Delivered in one carton ready to install, complete with factory fitted integral gear.

Plurio

Indicaciones para pedidos Se suministra completa con LED.

Descripción	Código ILCOS	Zócalo	Peso (kg)	Código SAP
Plurio Indirect, Symmetrical optic, original canopy				
PLI O 24L70-722-40 R/S T60 CL1 ANT	LED		9,5	96668684
PLI O 24L70-722-40 R/S T60 CL2 ANT	LED		9,5	96668685
PLI O 24L50-722-40 R/S T60 CL1 ANT	LED		9,5	96668686
PLI O 24L50-722-40 R/S T60 CL2 ANT	LED		9,5	96668687
PLI O 24L35-722-40 R/S T60 CL2 ANT	LED		9,5	96668689
PLI O 24L25-740 R/S BS 3550 T60 CL1 ANT	LED		9,5	96668674
PLI O 24L25-740 R/S BS 3550 T60 CL2 ANT	LED		9,5	96668675
PLI O 24L35-740 R/S BS 3550 T60 CL1 ANT	LED		9,5	96668676
PLI O 24L35-740 R/S BS 3550 T60 CL2 ANT	LED		9,5	96668677
PLI O 24L50-740 R/S BS 3550 T60 CL1 ANT	LED		9,5	96668678
PLI O 24L50-740 R/S BS 3550 T60 CL2 ANT	LED		9,5	96668679
PLI O 24L60-740 R/S BS 3550 T60 CL1 ANT	LED		9,5	96668680
PLI O 24L60-740 R/S BS 3550 T60 CL2 ANT	LED		9,5	96668681
PLI O 24L70-740 R/S BS 3550 T60 CL1 ANT	LED		9,5	96668682
PLI O 24L70-740 R/S BS 3550 T60 CL2 ANT	LED		9,5	96668683
Plurio Indirect, Symmetrical optic, round canopy				
PLI R 24L25-740 R/S BS 3550 T60 CL1 ANT	LED		9,5	96668690
PLI R 24L25-740 R/S BS 3550 T60 CL2 ANT	LED		9,5	96668691
PLI R 24L35-740 R/S BS 3550 T60 CL1 ANT	LED		9,5	96668692
PLI R 24L35-740 R/S BS 3550 T60 CL2 ANT	LED		9,5	96668693
PLI R 24L50-740 R/S BS 3550 T60 CL1 ANT	LED		9,5	96668694
PLI R 24L50-740 R/S BS 3550 T60 CL2 ANT	LED		9,5	96668695
PLI R 24L60-740 R/S BS 3550 T60 CL1 ANT	LED		9,5	96668696
PLI R 24L60-740 R/S BS 3550 T60 CL2 ANT	LED		9,5	96668697
PLI R 24L70-740 R/S BS 3550 T60 CL1 ANT	LED		9,5	96668698
PLI R 24L70-740 R/S BS 3550 T60 CL2 ANT	LED		9,5	96668699
PLI R 24L70-722-40 R/S T60 CL1 ANT	LED		9,5	96668700
PLI R 24L70-722-40 R/S T60 CL2 ANT	LED		9,5	96668701
PLI R 24L50-722-40 R/S T60 CL1 ANT	LED		9,5	96668702
PLI R 24L50-722-40 R/S T60 CL2 ANT	LED		9,5	96668703
PLI R 24L35-722-40 R/S T60 CL1 ANT	LED		9,5	96668704
PLI R 24L35-722-40 R/S T60 CL2 ANT	LED		9,5	96668705
Plurio Indirect, Symmetrical optic, flat canopy				
PLI F 24L25-740 R/S BS 3550 T60 CL1 ANT	LED		11	96668610
PLI F 24L25-740 R/S BS 3550 T60 CL2 ANT	LED		11	96668611
PLI F 24L35-740 R/S BS 3550 T60 CL1 ANT	LED		11	96668612
PLI F 24L35-740 R/S BS 3550 T60 CL2 ANT	LED		11	96668613
PLI F 24L50-740 R/S BS 3550 T60 CL1 ANT	LED		11	96668614
PLI F 24L50-740 R/S BS 3550 T60 CL2 ANT	LED		11	96668615
PLI F 24L60-740 R/S BS 3550 T60 CL1 ANT	LED		11	96668616
PLI F 24L60-740 R/S BS 3550 T60 CL2 ANT	LED		11	96668617
PLI F 24L70-740 R/S BS 3550 T60 CL1 ANT	LED		11	96668618
PLI F 24L70-740 R/S BS 3550 T60 CL2 ANT	LED		11	96668619
PLI F 24L70-722-40 R/S T60 CL1 ANT	LED		11	96668620

Plurio

Descripción	Código ILCOS Zócalo	Peso (kg)	Código SAP
PLI F 24L70-722-40 R/S T60 CL2 ANT	LED	11	96668621
PLI F 24L50-722-40 R/S T60 CL1 ANT	LED	11	96668622
PLI F 24L50-722-40 R/S T60 CL2 ANT	LED	11	96668623
PLI F 24L35-722-40 R/S T60 CL1 ANT	LED	11	96668624
PLI F 24L35-722-40 R/S T60 CL2 ANT	LED	11	96668625
Plurio Indirect, Symmetrical optic, disc canopy			
PLI D 24L25-740 R/S BS 3550 T60 CL1 ANT	LED	11	96668626
PLI D 24L25-740 R/S BS 3550 T60 CL2 ANT	LED	11	96668627
PLI D 24L35-740 R/S BS 3550 T60 CL1 ANT	LED	11	96668628
PLI D 24L35-740 R/S BS 3550 T60 CL2 ANT	LED	11	96668629
PLI D 24L50-740 R/S BS 3550 T60 CL1 ANT	LED	11	96668630
PLI D 24L50-740 R/S BS 3550 T60 CL2 ANT	LED	11	96668631
PLI D 24L60-740 R/S BS 3550 T60 CL1 ANT	LED	11	96668632
PLI D 24L60-740 R/S BS 3550 T60 CL2 ANT	LED	11	96668633
PLI D 24L70-740 R/S BS 3550 T60 CL1 ANT	LED	11	96668634
PLI D 24L70-740 R/S BS 3550 T60 CL2 ANT	LED	11	96668635
PLI D 24L35-722-40 R/S T60 CL1 ANT	LED	11	96668636
PLI D 24L35-722-40 R/S T60 CL2 ANT	LED	11	96668637
PLI D 24L50-722-40 R/S T60 CL1 ANT	LED	11	96668638
PLI D 24L50-722-40 R/S T60 CL2 ANT	LED	11	96668639
PLI D 24L70-722-40 R/S T60 CL1 ANT	LED	11	96668640
PLI D 24L70-722-40 R/S T60 CL2 ANT	LED	11	96668641
Plurio Direct, Symmetrical optic, original canopy			
PLD O 18L35-740 R/S BS 3550 T60 CL1 GY	LED	9,5	96260708
PLD O 18L35-740 R/S BS 3550 T60 CL2 GY	LED	9,5	96260711
PLD O 18L70-740 R/S BS 3550 T60 CL1 GY	LED	9,5	96260674
PLD O 18L70-740 R/S BS 3550 T60 CL2 GY	LED	9,5	96260678
PLD O 18L50-740 R/S BS 3550 T60 CL1 GY	LED	9,5	96260722
PLD O 18L105-740 R/S BS 3550 T60 CL1 GY	LED	9,5	96272421
PLD O 18L105-740 R/S BS 3550 T60 CL2 GY	LED	9,5	96272430
Plurio Direct, Symmetrical optic, round canopy			
PLD R 18L70-740 R/S BS 3550 T60 CL2 GY	LED	9,5	96260700
PLD R 18L70-740 R/S BS 3550 T60 CL1 GY	LED	9,5	96260690
PLD R 18L35-740 R/S BS 3550 T60 CL2 GY	LED	9,5	96260718
PLD R 18L50-740 R/S BS 3550 T60 CL2 GY	LED	9,5	96260732
PLD R 18L105-740 R/S BS 3550 T60 CL1 GY	LED	9,5	96272440
PLD R 18L105-740 R/S BS 3550 T60 CL2 GY	LED	9,5	96272444
PLD R 18L35-740 R/S BS 3550 T60 CL1 GY	LED	9,5	96668666
PLD R 18L50-740 R/S BS 3550 T60 CL1 GY	LED	9,5	96668668
Plurio Direct, Symmetrical optic, flat canopy			
PLD F 18L35-740 R/S BS 3550 T60 CL1 GY	LED	11	96668642
PLD F 18L35-740 R/S BS 3550 T60 CL2 GY	LED	11	96668643
PLD F 18L50-740 R/S BS 3550 T60 CL1 GY	LED	11	96668644
PLD F 18L50-740 R/S BS 3550 T60 CL2 GY	LED	11	96668645
PLD F 18L70-740 R/S BS 3550 T60 CL1 GY	LED	11	96668646

Plurio

Descripción	Código ILCOS Zócalo	Peso (kg)	Código SAP
PLD F 18L70-740 R/S BS 3550 T60 CL2 GY	LED	11	96668647
PLD F 18L105-740 R/S BS 3550 T60 CL1 GY	LED	11	96668648
PLD F 18L105-740 R/S BS 3550 T60 CL2 GY	LED	11	96668649

Plurio Direct, Symmetrical optic, disc canopy

PLD D 18L35-740 R/S BS 3550 T60 CL1 GY	LED	11	96668650
PLD D 18L35-740 R/S BS 3550 T60 CL2 GY	LED	11	96668651
PLD D 18L50-740 R/S BS 3550 T60 CL1 GY	LED	11	96668652
PLD D 18L50-740 R/S BS 3550 T60 CL2 GY	LED	11	96668653
PLD D 18L70-740 R/S BS 3550 T60 CL1 GY	LED	11	96668654
PLD D 18L70-740 R/S BS 3550 T60 CL2 GY	LED	11	96668655
PLD D 18L105-740 R/S BS 3550 T60 CL1 GY	LED	11	96668656
PLD D 18L105-740 R/S BS 3550 T60 CL2 GY	LED	11	96668657