




IndiQuattro

A range of slim recessed fluorescent direct/indirect luminaires providing efficient and well balanced task and ambient lighting

- Easier to install and maintain, even in shallow ceiling voids, due to new robust but slim 70 mm body with easily removed and retained optics
- Fast access to terminal block via flap in rear of body
- High light output and efficacy >55 lm/W, as well as luminance limit options below 1500 cd/m² or 3000 cd/m²
- The same great looking IndiQuattro louvre and diffuser optics and a shallow coffer for good architectural integration and ceiling brightness impression



Las fotos, dibujos y datos técnicos de iluminación son únicamente imágenes simbólicas. Para obtener datos detallados de un producto, por favor, pulse sobre el producto deseado.

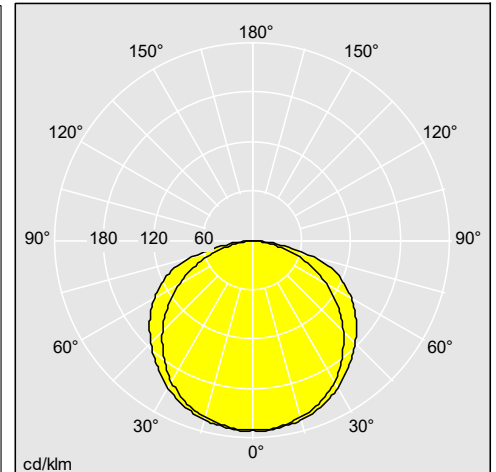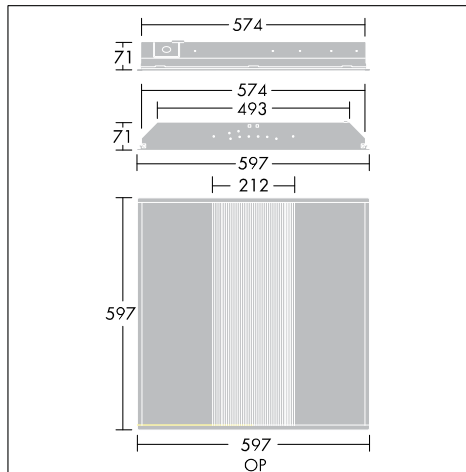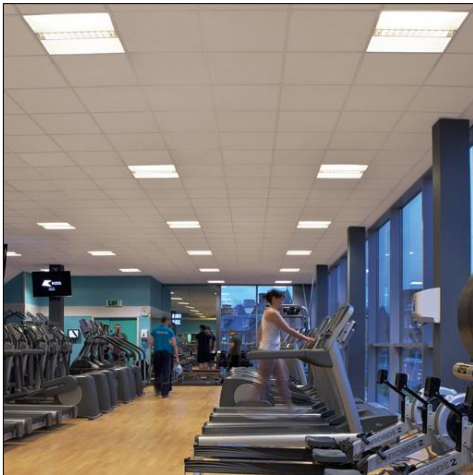

96548442

Material/ tipo

Body: white pre-painted steel (close to RAL 9010)

Coffer: sheet steel, post painted textured white (close to RAL 9010)

Diffuser: micro-perforated white painted steel or reeded opal acrylic

Louvre: aluminium in Satinbrite finish with micro-perforated white-painted steel sides

Instalación/ montaje

Suitable for lay-in only into 15mm or 24mm exposed tee grids, luminaire is offered into the ceiling and simply lays onto the ceiling grid, with easy electrical connection via external access flap on rear of body. Optics are easily removed and self-retained on one side for ease of lamp access.