Avenue D2

96261380 <AVD 18L35 730 RS BS 3550 CL2 CU N4M ANT

ISO 9223 C3	IDA DARK SKY APPROVED	IP66	IK08		CE			T_a -20 +25

Avenue D2

An elegant post-top LED lantern. Electronic, fixed output control gear. Light distribution: symmetric. Class II electrical, IP66, IK08. Base and arms: die-cast aluminium. Canopy: spun aluminium, finished textured anthracite (close to RAL7043). Lampshield: metallised polycarbonate with copper. Diffuser: clear UV stabilised polycarbonate with anti glare prisms.

Equipped with 50% power reduction circuit, effective 3 hours before and 5 hours after a calculated midnight. It can be deactivated at installation with an easily accessible internal switch. Pre-wired with 4m H05-RNF cable. Surge protection: 10kV single pulse common mode and 8kV multipulse common mode and 6kV multipulse differential mode. If permanent DALI system is connected, 6kV multipulse common and differential mode. Complete with 3000K LED

Dimensions: Ø596 x 732 mm
Luminaire input power: 21 W
Weight: 9 kg
Scx: 0.134 m²

TLG_AVED_F_3_AR2_COP_1700.jpg

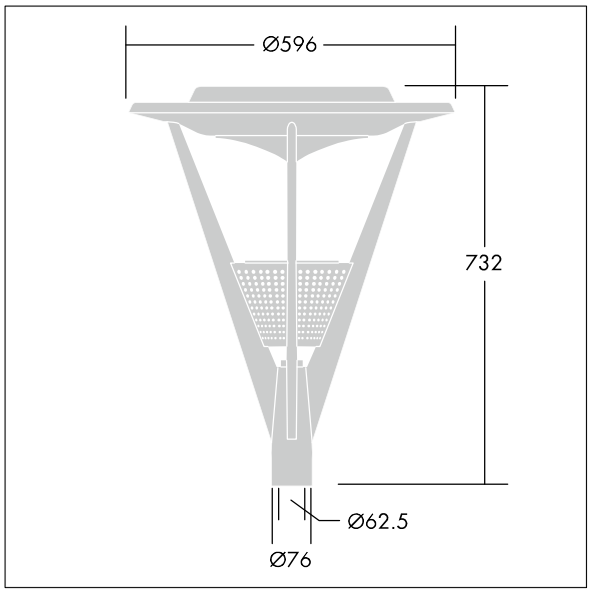

TLG_AVED_M_LEDLD1.wmf

Los valores marcados con un * son valores de referencia. Thorn utiliza componentes de fiabilidad y que han pasado los tests de calidad. Sin embargo, la tasa de fallos de la electrónica puede dar lugar a algún fallo aislado de algún LED durante la vida útil del producto. Las normativas internacionales fijan la tolerancia del flujo inicial y carga asociada en ±10%. Los valores son aplicables para una temperatura ambiente de 25 °C, a no ser que se indique de otro modo.

Los productos de Thorn Lighting están sujetos a un continuo desarrollo. Nos reservamos el derecho de planificar en nuestros productos sin publicaciones técnicas ni otras modicaciones formales.
© Thorn Lighting

Avenue D2

96261380 <AVD 18L35 730 RS BS 3550 CL2 CU N4M ANT

Los productos de Thorn Lighting están sujetos a un continuo desarrollo. Nos reservamos el derecho de planificar en nuestros productos sin publicaciones técnicas ni otras modicaciones formales.
© Thorn Lighting