D_CO LED Bollard MGR base adaptors

96262099 D-CO LED BOLLARD 700 30L50 830 CL2 CON

ISO 9223 C3	IP65	IK10		CE			T_a50

D_CO LED Bollard MGR base adaptors

A timeless LED bollard. Electronic, fixed output control gear. Class II electrical, IP65. Top and body: aluminium powder coated grey 900. Diffuser: semi-opal anti-UV polycarbonate. Suitable for flange mounting or with root spike (available separately). Complete with 3000K LED

Dimensions: Ø150 x 700 mm
Luminaire input power: 14 W
Weight: 4.15 kg

TLG_DCOL_F_LEDBOLLARDLIT.jpg

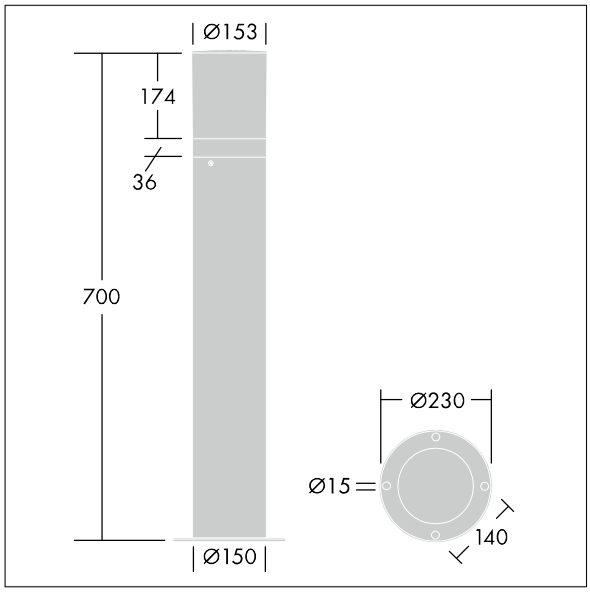

TLG_DCOB_M_BOLN.wmf

Este producto contiene una fuente luminosa de la clase de eficiencia energética F.

Los valores marcados con un * son valores de referencia. Thorn utiliza componentes de fiabilidad y que han pasado los tests de calidad. Sin embargo, la tasa de fallos de la electrónica puede dar lugar a algún fallo aislado de algún LED durante la vida útil del producto. Las normativas internacionales fijan la tolerancia del flujo inicial y carga asociada en ±10%. Los valores son aplicables para una temperatura ambiente de 25 °C, a no ser que se indique de otro modo.

Los productos de Thorn Lighting están sujetos a un continuo desarrollo. Nos reservamos el derecho de planificar en nuestros productos sin publicaciones técnicas ni otras modicaciones formales.
© Thorn Lighting