


## RF-Controller PIR E

Controlador para luminaria RF con PIR  
Ref. 96628011



## Diameter of motion detection

### 5 Meter Mounting Indicative Sensing Zones - Top View

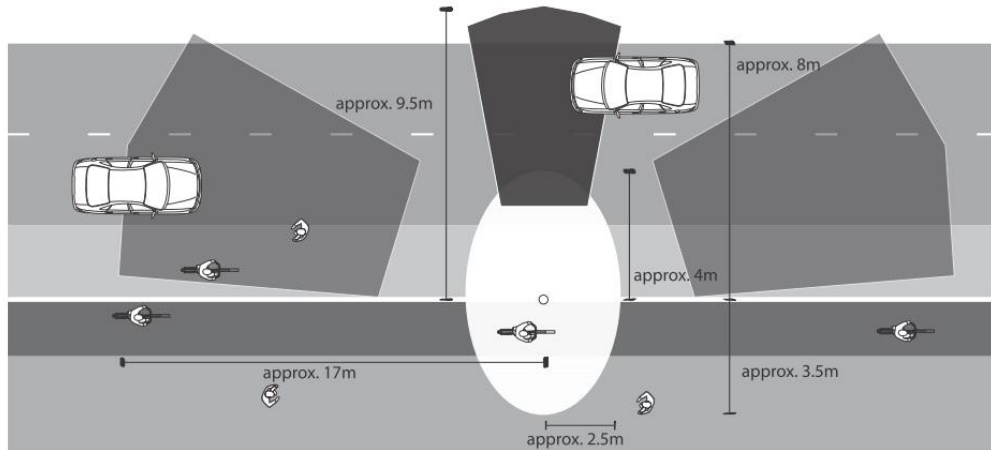

		Speed Range		
Sensor by colour		Pedestrian	Bicycle	Car
	Center	2-8 km/h	2-35 km/h	20-110 km/h
	Front	2-8 km/h	2-35 km/h	20-110 km/h
	Left / Right	2-8 km/h	2-35 km/h	20-130 km/h

#### Datos técnicos

Voltaje nominal de entrada	230VAC 50/60Hz
{failed}	207 - 253VAC 50/60Hz
Consumo	<4W
Clase de protección	Clase II
Temperatura ambiente	de -20°C a +70°C
Humedad	
Montaje	Montaje a columna, 5m de altura
{failed}	IP65
Dimensiones	100 x 125 x 95mm
Procesador	ARM Cortex-M3 CPU
{failed}	Max. 4 minutos/año
Protección eléctrica	
Potencia / DALI/ 1-10V	
Nivel lumínico por defecto	100%
{failed}	
{failed}	
{failed}	200m
{failed}	200:1
{failed}	
{failed}	
Area de detección del sensor	Ver imagen adicional