# Diffusalux

## 96633567 DIFF 3 5000-840 HF E3 L1500 LOS

| | | | | | | | | |
|---|---|---|---|---|---|---|---|---|
| IP40 | IK06 | | CE | | | 650°C | $T_a$25 | |

## Diffusalux

A surface mounted, LED luminaire. Fixed output LED driver with 3 hour, manual test, emergency lighting circuit. Class I electrical, IP40. Body: painted steel. End caps: polycarbonate with a curved, extruded opal polycarbonate diffuser. Ø21.5mm cable entry hole in the centre of the back spine. Standard BESA fixings at 600mm centres. Piano key terminal block. Complete with 4000K LED. Lumen output can be selected by internal link/switch. HF versions can select the following: 3050lm (LO) / 4750lm (ME) / 6300lm (HI). HFIX versions can select the following: 3250lm (LO) / 5500lm (ME). Default setting is Medium mode. For exact photometric and power information – please visit website and select drop down with LO / ME / HI modes.

Dimensions: 1490 x 200 x 81 mm
Weight: 2.9 kg

TLG_DFX3_F_PDB.jpg

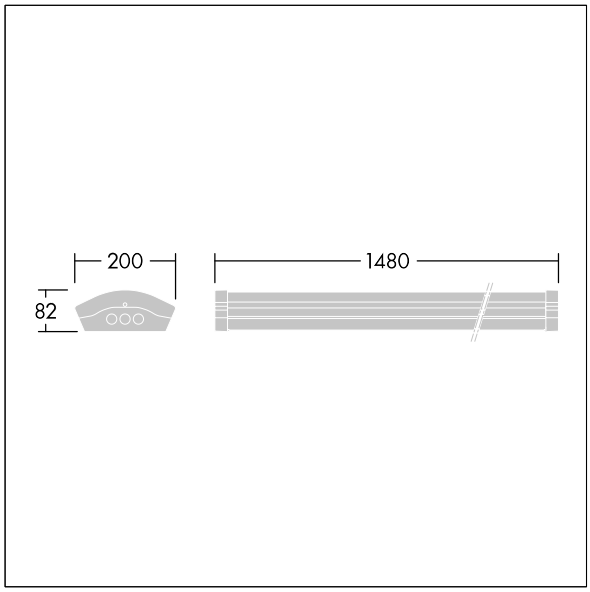


TLG_DFX3_M_LD1.wmf

Este producto contiene una fuente luminosa de la clase de eficiencia energética D.

Los valores marcados con un * son valores de referencia. Thorn utiliza componentes de fiabilidad y que han pasado los tests de calidad. Sin embargo, la tasa de fallos de la electrónica puede dar lugar a algún fallo aislado de algún LED durante la vida útil del producto. Las normativas internacionales fijan la tolerancia del flujo inicial y carga asociada en ±10%. Los valores son aplicables para una temperatura ambiente de 25 °C, a no ser que se indique de otro modo.

Los productos de Thorn Lighting están sujetos a un continuo desarrollo. Nos reservamos el derecho de planificar en nuestros productos sin publicaciones técnicas ni otras modicaciones formales.
© Thorn Lighting