Punch

96635396 <PUNCH 3 LRO MSP 6600-940 L15 HFIX SWD

IP20 | IK03 | 650°C | Ta 0 +25

Punch

A slim, suspended luminaire with direct/indirect distribution. DALI dimmable Electronic,. Equipped with pull cord dimming switch. Body: sheet steel, powder coated white (close to RAL9016). Endcaps: sheet steel powder coated white (close to RAL9016). Light guided via backlit multilayer PMMA LRO luminance reducing optic with UGR <19, closed optical system to prevent damage from electrostatic discharge, ideal for schools and offices. Class I electrical, IP20, Impact strength: IK03. Electrical connection via pre-installed power cord (2.5m). Complete with 4000K LED.

Y-Suspension connector included - Suspension cord with ceiling rose to be ordered separately (22171581).

Dimensions: 1542 x 162 x 50 mm
Luminaire input power: 63.4 W
Luminaire luminous flux: 6789 lm
Luminaire efficacy: 107 lm/W
Weight: 6.5 kg

TLG_PNCH_F_LRO_suspended_on_PDB.jpg

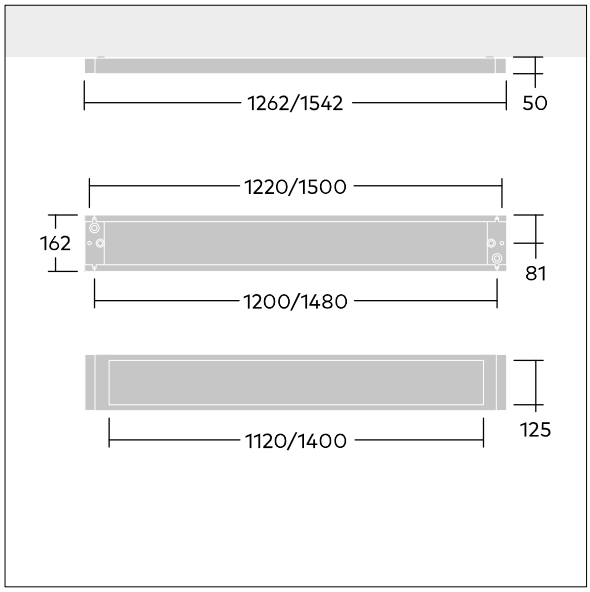

TLG_PNC3_M_PLEXD.wmf

Este producto incluye fuentes de luz con la clase de eficacia energética D.

Los valores marcados con un * son valores de referencia. Thorn utiliza componentes de fiabilidad y que han pasado los tests de calidad. Sin embargo, la tasa de fallos de la electrónica puede dar lugar a algún fallo aislado de algún LED durante la vida útil del producto. Las normativas internacionales fijan la tolerancia del flujo inicial y carga asociada en ±10%. Los valores son aplicables para una temperatura ambiente de 25 °C, a no ser que se indique de otro modo.

Los productos de Thorn Lighting están sujetos a un continuo desarrollo. Nos reservamos el derecho de planificar en nuestros productos sin publicaciones técnicas ni otras modicaciones formales.
© Thorn Lighting