Punch

96635402 <PUNCH 3 LRO MSC 3200-840 L12 HFIX E3

IP20 | IK03 | 650°C | T_a 0 +25

Punch

A slim, surface mounted luminaire with direct distribution. DALI dimmable Electronic, with 3 hour, manual test, emergency lighting circuit. Body: sheet steel, powder coated white (close to RAL9016). Endcaps: sheet steel powder coated white (close to RAL9016). Light guided via backlit multilayer PMMA LRO luminance reducing optic with UGR <19, closed optical system to prevent damage from electrostatic discharge, ideal for schools and offices. Class I electrical, IP20, Impact strength: IK03. Electrical connection via piano key terminal block. Complete with 4000K LED.

Can be used as a suspended direct only luminaire when combined with Y-Suspension connector and suspension kit (to be ordered separately 22171581 & 22171349).

Dimensions: 1262 x 162 x 50 mm
Luminaire input power: 22.2 W
Luminaire luminous flux: 3014 lm
Luminaire efficacy: 136 lm/W
Weight: 6.2 kg

TLG_PNCH_F_LRO_surface_on_PDB.jpg

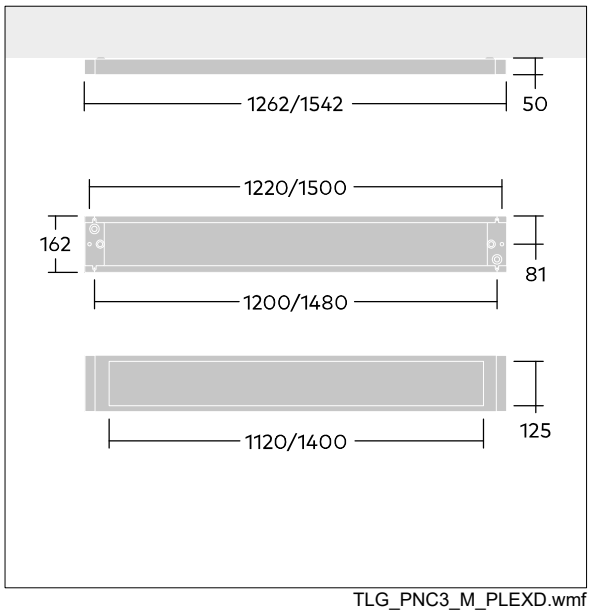

TLG_PNC3_M_PLEXD.wmf

Este producto contiene una fuente luminosa de la clase de eficiencia energética D.

Los valores marcados con un * son valores de referencia. Thorn utiliza componentes de fiabilidad y que han pasado los tests de calidad. Sin embargo, la tasa de fallos de la electrónica puede dar lugar a algún fallo aislado de algún LED durante la vida útil del producto. Las normativas internacionales fijan la tolerancia del flujo inicial y carga asociada en ±10%. Los valores son aplicables para una temperatura ambiente de 25 °C, a no ser que se indique de otro modo.

Los productos de Thorn Lighting están sujetos a un continuo desarrollo. Nos reservamos el derecho de planificar en nuestros productos sin publicaciones técnicas ni otras modicaciones formales.
© Thorn Lighting

Punch

96635402 <PUNCH 3 LRO MSC 3200-840 L12 HFIX E3

Los productos de Thorn Lighting están sujetos a un continuo desarrollo. Nos reservamos el derecho de planificar en nuestros productos sin publicaciones técnicas ni otras modicaciones formales.
© Thorn Lighting