

# Voyager One

# THORN

## 96636591 VOYAGER ONE P CON ANT ECD WH


IP20 IK03    $T_a$ -10  
+40

### Voyager One

Slim IP20 LED emergency lighting luminaire; Luminaire for central emergency light supply, for single luminaire monitoring via DALI (DALI-2 certified), settable emergency light level; non-maintained and maintained mode possible; addressing also alternatively possible visually or via EZ-addressing; Cable length from emergency power source to last luminaire: 300 m; additional click-optics optimised for escape routes and open areas from higher mounting heights available; Click in legends for viewing from a maximum distance of 23 m and 30 m available to convert to escape sign luminaire; housing made of polycarbonate white; cover mode of transparent polycarbonate; Tool-less 'click' mounting; zero maintenance thanks to LED technology; service life of 50,000 h at constant luminous flux; Power supply: 220/240 V AC; Luminaire input power: 4.3 W; IP20; class of protection: SC2; Impact strength: IK03; Dimensions: 336 x 59 x 158 mm; weight: 0.52 kg



TLG\_VOYO\_F\_CONTUS.jpg

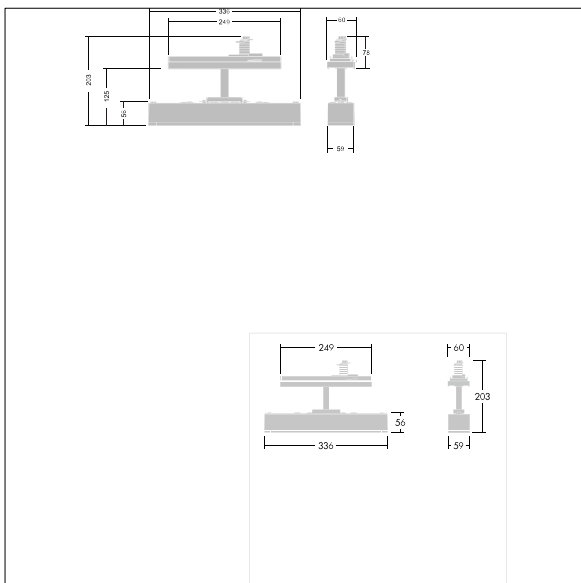

TLG\_VOYO\_M\_CONTUS.wmf

Los valores marcados con un \* son valores de referencia. Thorn utiliza componentes de fiabilidad y que han pasado los tests de calidad. Sin embargo, la tasa de fallos de la electrónica puede dar lugar a algún fallo aislado de algún LED durante la vida útil del producto. Las normativas internacionales fijan la tolerancia del flujo inicial y carga asociada en  $\pm 10\%$ . Los valores son aplicables para una temperatura ambiente de 25 °C, a no ser que se indique de otro modo.

Los productos de Thorn Lighting están sujetos a un continuo desarrollo. Nos reservamos el derecho de planificar en nuestros productos sin publicaciones técnicas ni otras modificaciones formales.

© Thorn Lighting