




Escort

A robust and durable bulkhead for surface mounting, sealed to IP65

- Durable cast alloy construction for interior and exterior usage
- Industrial or public amenity environmental usage
- Vandal resistant materials and fixings
- DALI and emergency E3 version available
- Wireless communication between luminaires thanks to the basicDIM modules
- Controlled via app built on Bluetooth® mesh technology



Las fotos, dibujos y datos técnicos de iluminación son únicamente imágenes simbólicas. Para obtener datos detallados de un producto, por favor, pulse sobre el producto deseado.

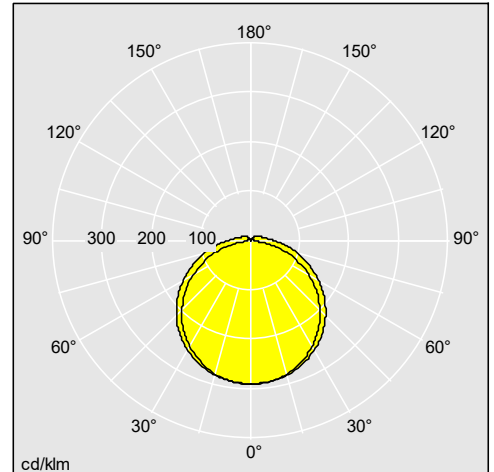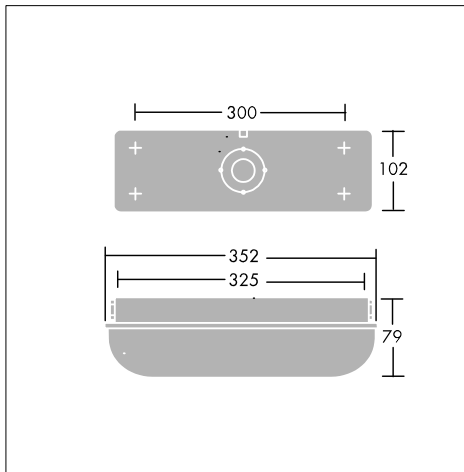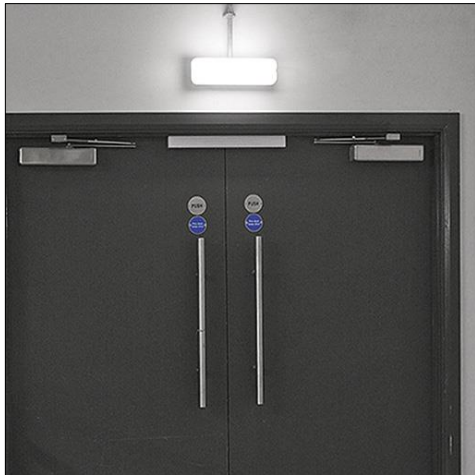

96630600

Material/ tipo

Body: cast aluminium, finished white

Diffuser: opal polycarbonate with vandal resistant screws

Instalación/ montaje

Direct wall or ceiling mounting. Drill points on rear for ceiling/wall box/BESA mounting. Rear cable entry hole and mounting points pre-drilled and sealed with rubber grommets. Ø20mm cable entry at either end and 4 fixing points. 3 way terminal block, 2x2.5mm² capacity. Cable gland and blanking grommets (2) supplied.

Escort

Indicaciones para pedidos

Descripción	Código ILCOS Zócalo	Peso (kg)	Código SAP
Escort			
ESCORT I-SLCT 800/1K-840 HF	LED	1	96636082
ESCORT 800-840 HF		1	96636106
ESCORT 1000-840 HF		1	96636107