



Avenue D2

Luminaria elegante y eficiente, con una carcasa prismática para evitar el deslumbramiento y proporcionar confort visual único

- IDA Dark Sky Approved
- *IDA fixture seal of approval relates to ≤ 3000 K only and clear enclosures. Luminaires must be mounted as photometered.
- Respectful of the environment with warm color temperature and reduced upward lighting $<1\%$ with dedicated optics (RSC, CST)
- Zd4i certified on request
- Decorative lampshield in copper or steel to create your own identity



Las fotos, dibujos y datos técnicos de iluminación son únicamente imágenes simbólicas. Para obtener datos detallados de un producto, por favor, pulse sobre el producto deseado.

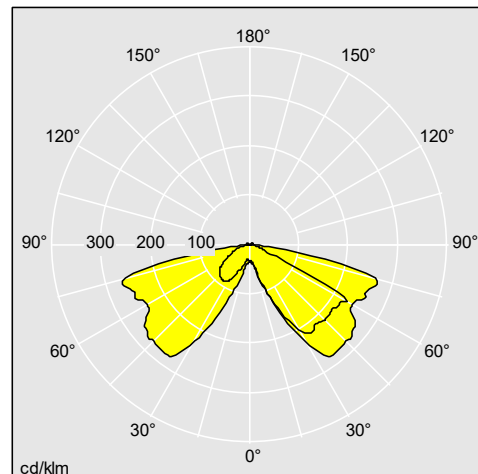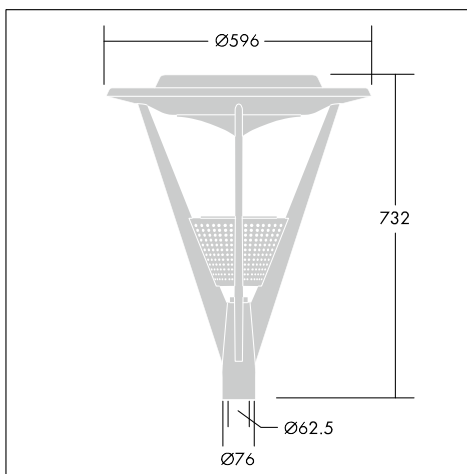

96261370

Material/ tipo

Base and arms: die cast aluminium (EN AC-46000, standard corrosion class C3).

Canopy: spun aluminium.

Finish: powder coated anthracite textured grey 900 (close to RAL7043). Via myProduct: Texturized light grey (GY), Black (BK) and 48 other RAL possibilities

Lampshield: metallised PC with copper or stainless steel, special varnish to prevent ageing effect and preserve the initial gloss appearance.

Diffuser: UV stabilised PC frosted or clear polycarbonate

Reflector and mirrors (street distribution): high reflective anodised aluminium.

Screw fixings: stainless steel.

Instalación/ montaje

Post top mounting: on spigot/columns Ø60mm. Recommended height: 3/4m, coordinated Avenue wall bracket. Spigot: 60mm (length: 90mm). Access to gear and LED module (replaceable) via 4 screws from the canopy. Product supplied with connector below the lantern or pre-wired with HO5 RN-F cable. Delivered ready to install, complete with factory fitted integral gear, all supplied in one box.