



FleXity

Tiny post-top lantern offering comfort and performance

- Available with opal diffuser for comfortable lighting or clear enclosure for best performances
- Respectful of its environment with zero upward lighting with clear enclosure
- Choice of dimming options and controls to reduce energy consumption: DALI2, Bi-power
- Zdal certified on request
- Ease of installation thanks to very low weight and pre-wiring



Las fotos, dibujos y datos técnicos de iluminación son únicamente imágenes simbólicas. Para obtener datos detallados de un producto, por favor, pulse sobre el producto deseado.

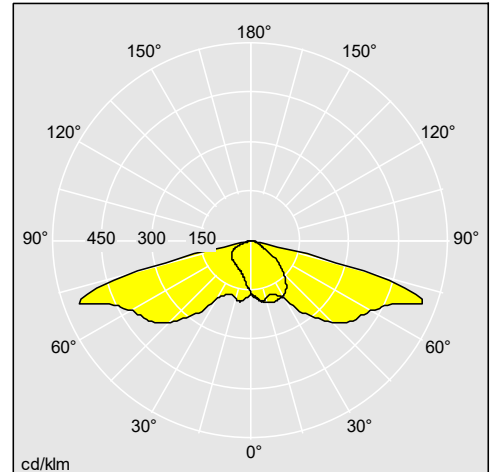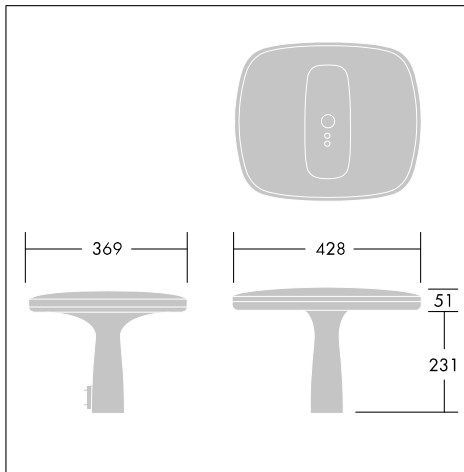

96270788

Material/ tipo

Canopy and base die cast aluminium (AS9U3, LM24 equivalent, EN AC-47100, standard corrosion class C3).

Diffuser: clear UV stabilised PC

Screw fixings: stainless steel

Finish: texturised anthracite (close to RAL7043), Choice of RAL colors via the configurator.

Instalación/ montaje

Suitable for mounting on column Ø76mm or Ø60mm, spigot internal length: 75mm. Recommended height: 3/6m. Equipped with cable gland or pre-wired with HO7RNF cable. Spare driver available. Delivered ready to install, complete with factory fitted integral gear tray, all supplied in a single carton.