



Cesar Wall

Versatile and contemporary architectural floodlight for decorative façade lighting

- Wall mounted luminaire available with 2 light distributions Narrow or medium beam, on one or two sides. Available in 2 sizes for easy integration into any environment
- Fácil instalación con una única herramienta para conexión automática.
- Also available as a ceiling variant with Cesar Ceiling range

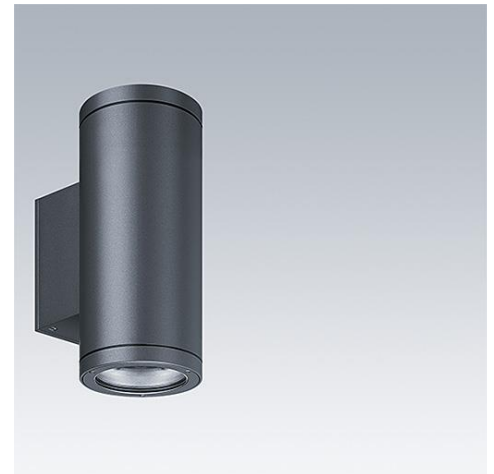

Las fotos, dibujos y datos técnicos de iluminación son únicamente imágenes simbólicas. Para obtener datos detallados de un producto, por favor, pulse sobre el producto deseado.

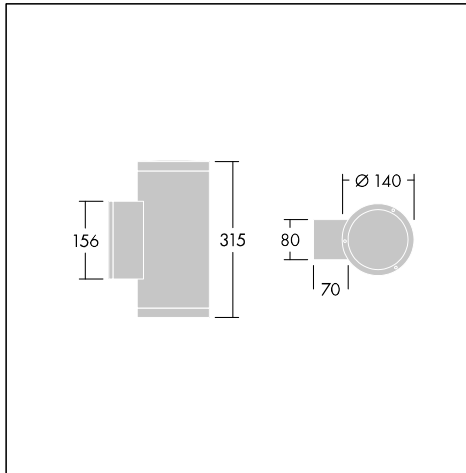

Material/ tipo

Body and frame: die-cast aluminium EN AN 44700 and extruded ENAW 6060 housing (copper free) with high corrosion resistance and powder painted close to RAL 7043. Other RAL colours available on request.

Front glass: toughened glass, thickness 8mm

Retaining screws: stainless steel

Gasket: silicone

Holographic films: non-yellowing polycarbonate

Instalación/ montaje

Upwards or downwards installation. Fix the plate to the wall with screws (not supplied). Connect the supply cable to the fast connector IP67 (supplied). Plug the fast connector and lock with the two Allen screws. Fast connectors for electrical connection, cable diameters: Size 1: 8-12mm; Sizes 2: 6-12mm

Accessories:

You can add holographic films under the glass with the structured side of the film in contact with the front glass. Rotate the film to obtain the required light effect.