


Candle Bollard

An environmentally respectful bollard with limited upward lighting emission

- Respectful of the environment with warm color temperature and reduced upward lighting <1% with dedicated optics WSC, RSC, CST
- Great lighting comfort with prismatic filter for a sparkling effect
- Bi Power switch dimming, Multilayers dimming and motion detection to reduce energy consumption
- Part of the CANDLE family



Las fotos, dibujos y datos técnicos de iluminación son únicamente imágenes simbólicas. Para obtener datos detallados de un producto, por favor, pulse sobre el producto deseado.

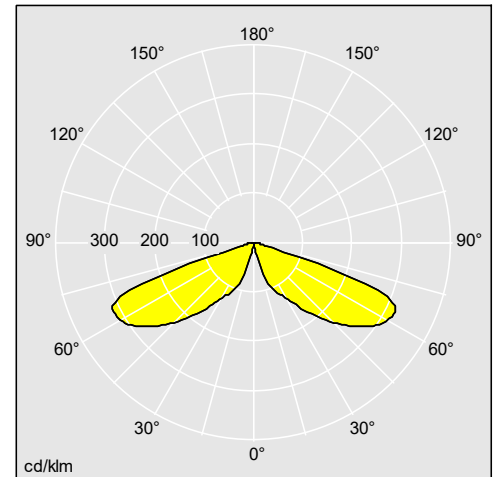

96680919

Material/ tipo

Canopy: die cast aluminium (EN AC-44300)

Finish: powder coated anthracite textured grey 900 (close to RAL7043).) Via the configurator: Texturized light grey (GY), texturized black (BK) and 48 other RAL possibilities.

Bowl: UV stabilised polycarbonate clear

Standard corrosion class C5 according to ISO 9223: 2012.

Instalación/ montaje

For Root and Flange mounting: 4 x anchor bolts M14 (96009822 to be ordered separately)

Delivered complete. Access door only for Master and Bi Power Switch variant.

Gear box (including the driver) and head (including the LEDs) are easily replaceable as spares.

Candle Bollard

Indicaciones para pedidos

Descripción	Código ILCOS Zócalo	Peso (kg)	Código SAP
Candle Bollard			
CN B 8L25 830 RSC CL2 MPL ANT	LED	8,03	96680918
CN B 8L35 830 RSC CL2 MPL ANT	LED	8,03	96679073
CN B 8L50 830 RSC CL2 MPL ANT	LED	7,95	96679074
CN B 8L70 830 RSC CL2 MPL ANT	LED	7,95	96679075
CN B 8L25 830 RSC CL1 MPL ANT	LED	8,03	96680919
CN B 8L35 830 RSC CL1 MPL ANT	LED	7,98	96679076
CN B 8L50 830 RSC CL1 MPL ANT	LED	7,98	96679077
CN B 8L70 830 RSC CL1 MPL ANT	LED	7,98	96679078