


Candle

A slim sparkling lighting column for parks and building surrounds application

- Great lighting comfort with prismatic filter for a sparkling effect
- Respectful of the environment with warm color temperature and reduced upward lighting <1% with dedicated optics WSC, RSC, CST
- A unique design identity with a discreet luminaire mounted on a dedicated 160mm column (to be ordered separately)
- Part of the CANDLE family



Las fotos, dibujos y datos técnicos de iluminación son únicamente imágenes simbólicas. Para obtener datos detallados de un producto, por favor, pulse sobre el producto deseado.

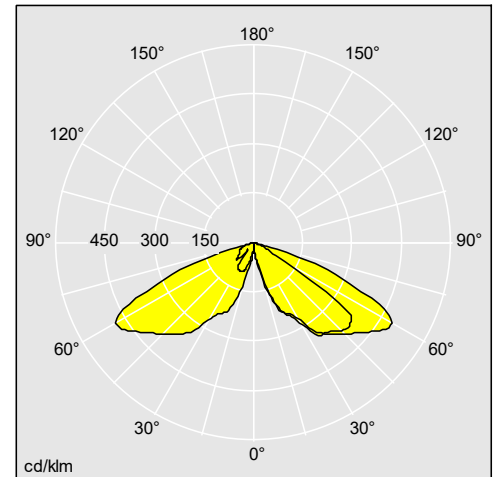

96679090

Material/ tipo

Canopy: die cast aluminium (EN AC-44300)

Finish: powder coated anthracite textured grey 900 (close to RAL7043).) Via the configurator: Texturized light grey (GY), Black (BK) and 48 other RAL possibilities.

Bowl: UV stabilised polycarbonate clear

Standard corrosion class C5 according to ISO 9223: 2012.

Instalación/ montaje

Mounting on a dedicated 160mm column 3 or 4 meters height (to be ordered separately). Pre-wired for ease of installation. Maintenance of gear tray at the base of the luminaire.

Candle

Indicaciones para pedidos

Descripción	Código ILCOS Zócalo	Peso (kg)	Código SAP
Candle			
CN 18L25 730 RSC CL2 W3 ANT	LED	4,84	96679079
CN 18L50 730 RSC CL2 W3 ANT	LED	4,84	96679080
CN 18L70 730 RSC CL2 W3 ANT	LED	4,84	96679081
CN 18L105 730 RSC CL2 W3 ANT	LED	4,84	96679082
CN 18L25 730 RSC CL1 W3 ANT	LED	4,89	96679083
CN 18L50 730 RSC CL1 W3 ANT	LED	4,89	96679084
CN 18L70 730 RSC CL1 W3 ANT	LED	4,89	96679085
CN 18L105 730 RSC CL1 W3 ANT	LED	4,89	96679086
Candle, columns			
CANDLE POLE 3M MPL RXXXX		38	96681052