


Aquaforce

Aquaforce, a flexible, high performance, IP66 & impact resistant luminaire for challenging areas

- Switchable lumen output: One luminaire, four lumen outputs (configured through adjusting two dip-switches) offer maximum flexibility during installation and efficient stockholding at wholesalers.
- Resistant to water, dust, dirt and impact: This robust luminaire is resistant to the elements, with high IP66 and IK08 rating. A clever drip-edge design avoids dust and dirt depositing on the light output surface
- Distribución de luz inteligente: Dispone de diferentes curvas fotométricas, con un alto nivel de iluminación para un número mínimo de luminarias. La tecnología de vanguardia para la transmisión de luz, proporciona una luz suave sin cortes afilados.
- Efficient output: with lumen outputs up to 6.400lm the luminaire is powerful and has a efficiency as high as 148 lm/W, energy savings are significant
- Sensor: With the option to include a microwave sensor in Aquaforce, energy efficiency can be further enhanced
- Montaje sencillo: Fácil de instalar, usar y mantener. Puntos de anclaje lineales que permiten una instalación más versátil, además nuestro mecanismo EasyClick permite un montaje sencillo y rápido, y dispone de siete posibilidades de cableado diferentes



Las fotos, dibujos y datos técnicos de iluminación son únicamente imágenes simbólicas. Para obtener datos detallados de un producto, por favor, pulse sobre el producto deseado.

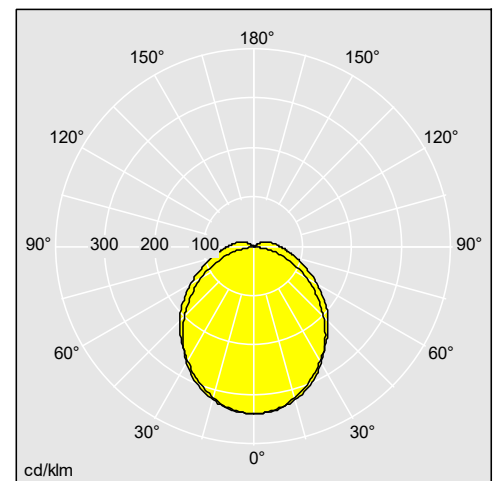

96636066

Material/ tipo

Canopy: light grey polycarbonate (PC)

Diffuser: polycarbonate (PC), high transmission opal diffuser, combining scattering effects inside material with refraction prisms.

Instalación/ montaje

Patented snap-on mechanism EasyClick for rapid, clipless mounting and opening of diffuser. Approved for indoor use or in canopied outdoor areas. Extended mounting slots for highest on site flexibility.

Surface: suitable for direct surface or BESA mounting. 10 cable entry options at 5 different positions. Quick-fix brackets supplied for surface mounting. Suitable for ceiling and wall mounting (both vertically and horizontally).

Chain suspension: mounting kits for conduit, chain suspension and catenary suspension are available as accessories.

Aquaforce

Indicaciones para pedidos

Descripción	Código ILCOS Zócalo	Peso (kg)	Código SAP
Aquaforce			
AQF S LED4300-840 PC WB HFLS		1,47	96636061
AQF L LED6400-840 PC WB HFLS	LED	2	96636062
AQF S LED4300-840 PC MB HFLS		1,47	96636065
AQF L LED6400-840 PC MB HFLS	LED	2	96636066