IndiQuattro

96549985 <IQ 2x40W TC-L HFI E3 LV L840

	IP20	IK03		CE	960°C	T_a25	

IndiQuattro

Recessed modular direct/indirect luminaire for 2 x 40W Light Source: 2 x TC-L / 40W lamp(s) with Electronic, DALI / DSI digital dimmable control gear with 3 hour, manual test, emergency lighting circuit. Body and coffer in white painted steel with satinbrite aluminium louvre and micro perforated white painted steel sides. Lay in installation to 15/24mm exposed tee ceilings only. Easy electrical connection via 6 x 2 x 2.5mm² terminal block under external access flap on rear of body. Complete with 840 lamp(s).

Dimensions: 597 x 597 x 70 mm
Luminaire input power: 86 W
Weight: 3.9 kg

TLG_INDQ_F_B2X55WLVRDSB.jpg

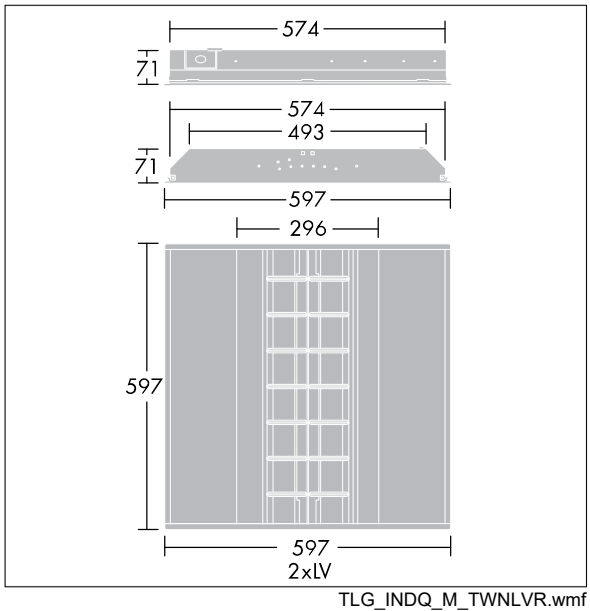

TLG_INDQ_M_TWNLVR.wmf

Los valores marcados con un * son valores de referencia. Los valores son aplicables para una temperatura ambiente de 25 °C, a no ser que se indique de otro modo.

Los productos de Thorn Lighting están sujetos a un continuo desarrollo. Nos reservamos el derecho de planificar en nuestros productos sin publicaciones técnicas ni otras modicaciones formales.
© Thorn Lighting